


RGB Combiner

① SMF High efficiency type

※ All the specifications be the values under room temperature.


Parametric	Specification			Unit
Wavelength	488	532	640	nm
Efficiency	≥80			%
Operating temperature range	-5~+75			°C
Storage temperature range	-40~+85			°C

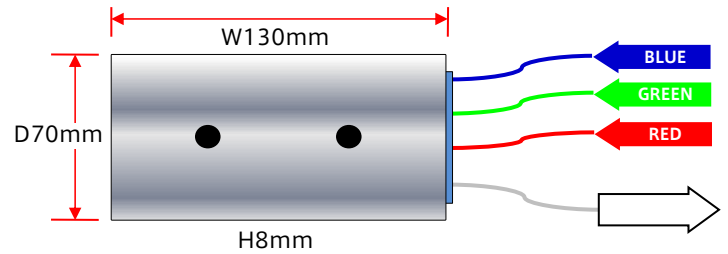

② SMF Small Package Type

※ All the specifications be the values under room temperature.

Parametric	Specification			Unit
Wavelength	488	532	640	nm
Efficiency	60(Typical)			%
Operating temperature range	-5~+75			°C
Storage temperature range	-40~+85			°C

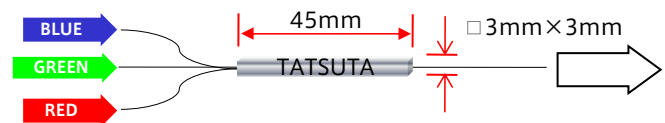

③ PM fiber type

※ All the specifications be the values under room temperature.

Parametric	Specification			Unit
Wavelength	488	532	640	nm
Efficiency	≥70			%
Polarization extinction ratio	≥15			dB
Operating temperature range	-5~+60			°C
Storage temperature range	-40~+85			°C

