


# Single Mode Fiber Couplers

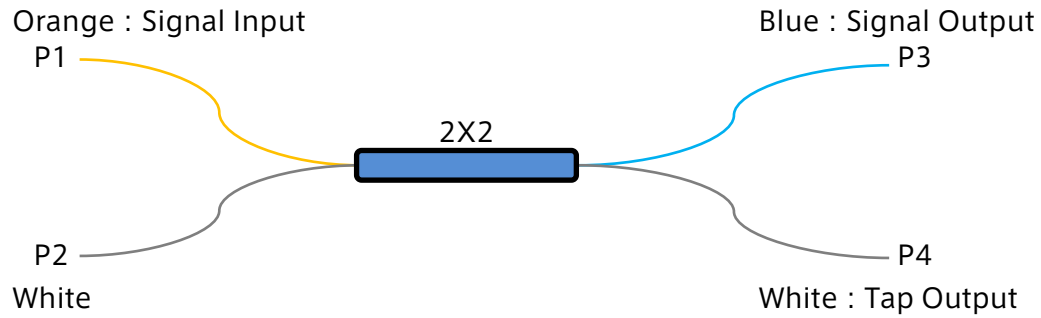

Operating Wavelength	Specifications								nm
	445	473	488	532	560	635	650	658	
Coupling Ratio	99:1 ±0.5								%
Coupling Ratio	95:5 ±1.5								%
Coupling Ratio	90:10 ±3.0								%
Coupling Ratio	67:33 ±4.0								%
Coupling Ratio	50:50 ±5								%
Typical Excess Loss	≤10								%
Return Loss / Directivity	≥50								%
Operating Temperature	-5~+75								°C
Storage Temperature	-40~+85								°C

※ All the specifications be the values under room temperature.

Operating Wavelength	Catalog Number	Coupling Ratio	Catalog Number	Configuration	Catalog Number	Connector
445nm	M	99:1	Y	1X2	O	No Connector
473nm	P	95:5	X	2X2	P	FC/PC
488nm	D	90:10			A	FC/APC
532nm	T	67:33				
560nm	H	50:50				
635nm						
650nm						
658nm						

※ Please ask for details.